

Jeep® Classic Duo Instructions



Jeep®

by **bernwithstyle**



WARNING

Please take a moment to read through these instructions before you use your Jeep® Stroller.

Important Safety Information:

- Never leave your child unattended while in stroller.
- To prevent choking hazard, remove and discard all packing material before using this product.
- Always use restraint system to keep child from standing up or falling out of the stroller. Use the harness at all times.
- Always balance the weight of the stroller evenly.
- Always lock the stroller open before allowing your child in or near the stroller.
- Only use this stroller with a child weighing less than 20 kg.
- Put on all brakes whenever you park the stroller.
- Never use this stroller on stairways or escalators.
- Do not allow children to stand on seat or sit on footrest.
- This is not an exercise stroller. Do not use product while running, jogging or participating in other athletic activities.
- Do not put child in basket.
- Do not carry extra children or use accessories other than those approved by the manufacturer.
- The stroller should not be used near an open fire or exposed flame.
- Make sure children are clear of any moving parts if you adjust the stroller, otherwise they may be injured.
- Do not put more than 4 kg in the basket.

Stroller Parts



Stroller Frame



Bumper Bar



Rear Wheels (2)

Toddler Seat Parts



Rocker/Toddler seat



Toy bar



Bumper bar



Canopy

How to Assemble Your Stroller

To Open Stroller

- 1 Remove any cardboard inserts or plastic ties used to protect the product during shipment.



- 2 Release the locking latch.



- 3 Unfold, making sure both side locks snap into place.

To Assemble Rear Wheels

- 1 Remove and discard protective plastic sleeve from ends of rear axle assembly.



- 2 Position rear wheel on leg of stroller, and push until spring loaded buttons click into place.



- 3 Repeat for second side.



- 4 To release wheel, push on the centre button as shown and pull wheel off.

To remove rear brake assembly:
Push in spring buttons on either side of the brake assembly and pull off.

To Attach Bumper Bar



- 1 Place bumper bar onto metal tubing over screw as shown.



- 2 Snap tab in place.
Repeat for second side.

To Adjust Canopy



- 1 **To close canopy:** Push on front of canopy to move backwards.



- 2 **To open canopy:** Pull canopy open to desired position.

How to Properly Use Your New Stroller

To Secure Child In Stroller




1 Lock foot brake to keep stroller from rolling. (see page 12)

2 Place child in stroller.

3 Hook shoulder straps to waist belt.



4 To fasten restrain system buckles - push together. Be sure both buckles are fastened to secure child safely.



5 To unstrap restrain system buckles - press tabs to release.

6 For proper fit, adjust shoulder straps and waist band as shown.



To Adjust Shoulder Strap Height



1

Un-hook shoulder strap from waist belt as shown.



2

Pull shoulder strap through the webbing as shown.



3

Hook the shoulder straps to waist belt as shown. Repeat for second strap.

Note: For a secure fit, straps should be at or above the child's shoulder. Adjust straps to a higher position as your child grows.

To Recline Seat



- 1** RECLINE SEAT: Pull buckles to desired recline as shown.



- 2** QUICK RECLINE: To recline seat fully, release buckles as shown.



- 3** RAISE SEAT: Make sure both buckles are fastened. Pull strap on both sides of stroller to desired height.

To Operate Brakes



- 1 To lock brake:** Push down on brake bar to lock wheels.



- 2 To unlock brake:** Lift up on brake bar.

To Operate Front Swivel Wheel Lock



- 1 Unlock front swivel:** Pull latch located on the left hand side of frame beneath the folding latch towards you until button pops out.
- 2 Lock front swivel:** Release latch and the front wheel will lock into place.


Please Note: On rough surfaces, lock the wheel to keep straight. On smooth surfaces, unlock to allow the wheel to swivel.

To Fold Stroller

1 Lock brakes. (see page 12)



2 Close canopy. (see page 8)

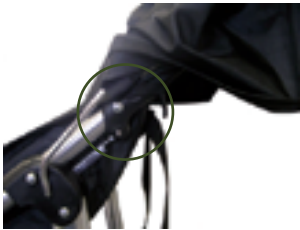

3 Pull up latch on each side of stroller as shown.



4 Push stroller down to fold.



5 Engage locking latch.

To Position Toddler Seat on Stroller



- 1 Remove the bumper bar from the stroller.

Place the toddler seat tabs onto the stroller frame making sure that the tabs are placed over the protruding screws.



- 2 Snap tabs in place.

Please note: If the seat is not fixed properly onto the stroller frame it could move forward and become dangerous.



- 3 Pull back clip on footrest. Place toddler seat bar into clips and snap into place.

To Recline Toddler Seat



- 1 Pull handle up and pull back on the toddler seat.



- 2 Adjust to desired position.

To Attach bumper bar




- 1 Push bumper bar onto the arms of the toddler seat/rocker until they click into place.

To remove bumper bar:
Push levers in and slide off.

Please Note: We recommend that the bumper bar remains fixed while used as a rocker.

To Attach Canopy

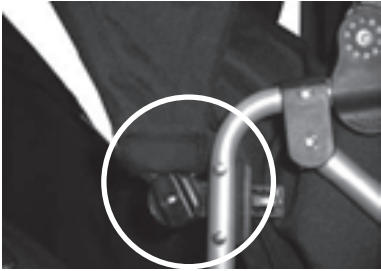


1

Place the two ends of the canopy into the slots in the rocker/toddler seat and click into place.

To Remove Canopy: Push the raised area in and pull the canopy out of the slots.

To Attach toy bar

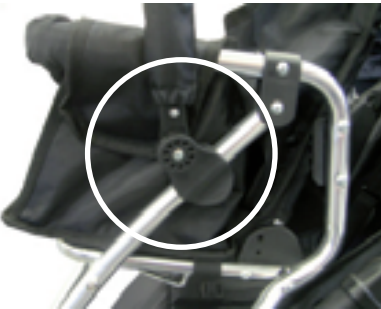

1

Push and click the ends of the toy bar over the rocker/toddler seat frame.

Please Note: Toy bar is not designed to be used as a carry handle.

There are many ways to look after and protect your Jeep stroller. The most important is to clean up any spills or food, before it dries on the fabric.

As the covers are not designed to be easily taken off for washing, (for safety reasons) the easiest method to clean is, sponge the surfaces with a mild solution of warm water liquid laundry detergent. Rinse well with clean sponge and leave to dry out of direct sun.

Sand and Salt water should be rinsed with a hose and wiped dry to prolong the life of the wheels, axles and other moving parts.

Never use petroleum based lubricants on your stroller, the most suitable lubricants are silicone based products.

Warranty

Jeep is a registered trademark of DaimlerChrysler Corporation, and is used under license by Born With Style. ©DaimlerChrysler Corporation 2007.

Born With Style warrants this product to be free of defects in materials and workmanship as follows: For a period of ONE YEAR from the date of purchase, Born With Style will repair or replace, at its option, the defective product. This warranty is given in addition to (and not in substitute for) applicable statutory rights which you may have.

We sincerely thank you for purchasing this Born With Style product.

For further information visit: www.bornwithstyle.com.au

For all spare parts, repairs or warranty issues, please contact:

Karlisles

Phone: 1300 308 435

Email: info@karlisles.com.au

Web: www.karlisles.com.au

Replacement parts provided by local distributor due to accidental damage or misuse will be charged accordingly.

To contact the manufacturer directly:

Born With Style

PO Box 789

Gladesville NSW 1675, Australia

Phone: 1300 855 337 or 02 9816 3837

Email: info@bornwithstyle.com.au

Web: www.bornwithstyle.com.au

This product meets and exceeds Australian Standard AS/NZS 2088:2000

Personal Record Card

Born With Style recommends that you keep a record of important information about your Jeep® s troller. Please complete the information in the space provided.

Model Number:

Date of Manufacture:

Date of Purchase: