

⚠ WARNING ⚠

IMPORTANT: BEFORE ASSEMBLING THIS COT READ AND UNDERSTAND THE INSTRUCTIONS. INCORRECT ASSEMBLY MAY MAKE THE COT UNSAFE. DO NOT USE THIS COT IF ANY PART IS BROKEN, TORN OR MISSING. KEEP THESE INSTRUCTIONS IN A SAFE PLACE FOR FUTURE REFERENCE.

- **NEVER** leave child unattended. **ALWAYS** keep child in full view.
- Cot **MUST** be fully assembled with all top rails locked into position prior to attaching bassinet / changing table.
- **DO NOT** place child in cot unless all top rails are securely locked into position and floor pad is in proper place. Infant may roll into space between pad and loose mesh sides causing suffocation.
- This portable cot is intended for use by a child who cannot climb out of the cot and is less than 35" (890 mm) tall and weighs less than 30 lbs. (14 kg).
- **DO NOT** use this cot if the covering material has been bitten through.
- **MATTRESS SIZE:** This cot is made to use a mattress which is 362 mm wide 940 mm long and no more than 15.8 mm thick. Using the wrong size mattress may create hazardous gaps that could result in suffocation or could reduce the side height of the cot which may result in your child falling out from the cot.
- **DO NOT** use bassinet / changing table when child is in cot.
- **STOP** using the bassinet / changing table when your infant is 3 months old or weighs more than 15 lbs. (6.8 kg).
- To prevent injury from falls, **DO NOT** use bassinet / changing table when child is able to sit up or roll or push up on hands and knees.
- Use all clips to attach bassinet / changing table to the cot. Make sure clips are fully snapped into place. **DO NOT** use if any clips are broken or missing.
- **ALWAYS** use restraint system when changing child on the changing table.
- **ALWAYS** keep child within arms reach when using the changing table.
- **DO NOT** use bassinet / changing table on a bed, floor or other surfaces.
- The bassinet / changing table is designed for use **ONLY** with this Jeep® Travel Cot. Only use bassinet / changing table provided by the manufacturer.
- **DO NOT** use the changing table as a sleeping or play area.
- **ALWAYS** keep objects in parent organizer out of child's reach.
- **DO NOT** allow children to play with or hang on to saddle bag.
- **DO NOT** place more than 5 lbs. (2.27 kilos) in the saddle bags.
- **DO NOT** allow infants or children to play with the saddle bag. It is not a toy.
- Before each use or assembly of product, inspect for damaged hardware, loose joints, missing parts or sharp edges. **DO NOT** use product if any parts are missing or broken. Contact Kolcraft for replacement parts and instructional literature if needed. **DO NOT** use substitute parts.
- Although Kolcraft **DOES NOT RECOMMEND** refinishing this product, if you choose to refinish, use a nontoxic finish specified only for children's products.

AVOID SUFFOCATION HAZARDS:

- To prevent suffocation from entrapment, use only the floor pad provided by manufacturer. **NEVER** use additional mattresses or padding.
- If a sheet is used, only use a fitted crib sheet that tucks at least 2" (5 cm) under the bassinet/changing table or floor pad on all sides to avoid entanglement.
- When using bassinet, make sure floor pad is securely under elastic side pockets and sits flat against floor of bassinet.
- **DO NOT** leave child in product with any side lowered. Be sure all sides are raised and locked in position whenever child is in product.
- **NEVER** use plastic shipping bags as mattress covers. Do not use plastic film as mattress cover unless sold and intended for that purpose. They can cause suffocation.
- **DO NOT** use a water mattress with this product.

AVOID STRANGULATION HAZARDS:

- **NEVER USE** additional mattresses, padding, sheets, or other objects that will permit your child to climb out, fall and/or be injured. If you choose to ignore this warning, then remove additional padding, large toys, and other objects that could serve as steps for climbing out when your child is able to pull to a standing position.
- Strings can cause strangulation! **DO NOT** place items with a string around child's neck (hood strings, pacifier cords, etc.) or attach strings to toys.
- **DO NOT** suspend strings into the bassinet/changing table or cot.
- **DO NOT** place the cot near a window where cords from blinds or drapes can strangle a child.

AVOID HEAT EXPOSURE HAZARDS:

To avoid over-heating your child:

- Keep product out of direct sunlight.
- Turn mesh sides away from direction of sun.
- Use weather screen and canopy to provide shade for your child.
- **ALWAYS** keep entire floor pad shaded from sunlight.
- **NEVER** use your canopy when the bassinet/changing table is in use.
- **ALWAYS** maintain good ventilation by keeping three mesh panels open at all times.

AVOID OTHER HAZARDS:

- **DO NOT** use the cot near naked heat sources, bar heaters, open fires or exposed flames.
- Keep medication, and small items that a child could choke on away from the cot.
- The thickness of the mattress has been specified to ensure that the distance from the top of the mattress to the top of the lowest side or end will always be at least 500 mm. This will reduce the risk of children falling out of the cot.
- **DO NOT** place more than one child in bassinet, cot or on changing table.
- **DO NOT** use in a motor vehicle - child can be seriously injured during an accident or sudden stop.
- **DO NOT** move or fold bassinet / changing table, or cot with child in it - child could be injured.

1 TO SET UP COT:

⚠ WARNING!

- FAILURE TO LOCK ALL 4 TOP RAILS IN UPRIGHT POSITION CAN RESULT IN DEATH BY SUFFOCATION.
- INFANTS CAN SUFFOCATE IN GAPS BETWEEN AN EXTRA MATTRESS, SIDE OF PRODUCT AND ON SOFT BEDDING. **NEVER** ADD A MATTRESS, PILLOW, COMFORTER OR PADDING. USE ONLY MATTRESS/PAD PROVIDED BY MANUFACTURER.
- **NEVER** LEAVE INFANT IN PRODUCT WITH SIDES DOWN. INFANT MAY ROLL INTO SPACE BETWEEN PAD AND LOOSE MESH SIDE CAUSING SUFFOCATION.

REMOVE UNIT FROM BAG, UNFASTEN VELCRO STRAPS AND REMOVE FLOOR PAD FROM UNIT.

Step 1: Stand folded unit in an upright position (Figure A).

Step 2: Pull up sharply on center floor strap to make sure floor joints are unlocked. Strap must be even with top rails.

Step 3: Lift each top rail until it locks (Figure B).

- Top rails automatically lock when lifted fully.
- Top rails cannot lock if the floor is flattened first.
- If one or more of the top rails will not lock, pull sharply on center floor strap to make sure floor joint(s) are unlocked.
- Check that all four top rails are locked before proceeding to Step 3.

Step 4: Push down all four floor joints and center to flatten and lock floor (Figure C).





- Floor rails lock automatically when flattened.
- To unlock floor rails, pull sharply on center floor strap.

Step 5: Install floor pad, padded side up. Fold velcro straps under the floor. Do not use cot without floor pad.

Step 6: To avoid possible injury or death to you child. Check to make sure:

- All 4 top rails are locked.
- Floor is flat.
- Floor pad is installed.
- Do not use if tubes are bent or mesh sides are loose.

Step 7: To attach fender to wheels slide fender tabs into designated slots and push down (Figure D). Fender will cover top of wheel (Figure E).

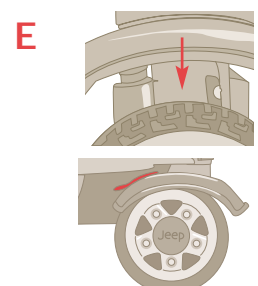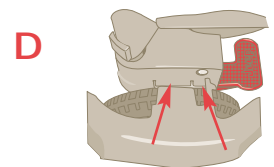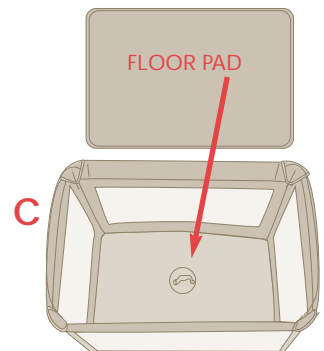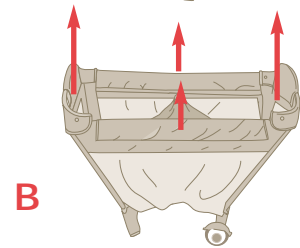


2 INSPECT COT BEFORE USE:

IMPORTANT: Always use this illustration to inspect the cot before use.


Step 1: Push down on all 4 top rails to make sure they are locked ("A" on illustration).

Step 2: Push down on all 4 floor joints and center to make sure they are locked and floor is completely flat ("B" on illustration).

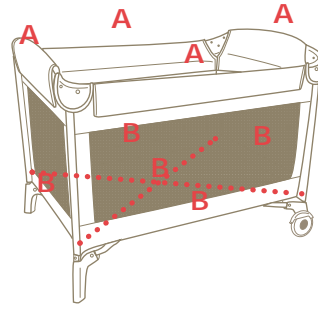


3 TO ASSEMBLE BASSINET / CHANGING TABLE :



Step 1: Unfold bassinet / changing table and lay flat, as shown (Figure A).

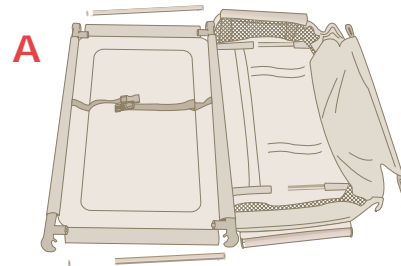


Step 2: Take one of the provided metal tubes and slide through one of the sleeves at either end of the changing table (Figure B).

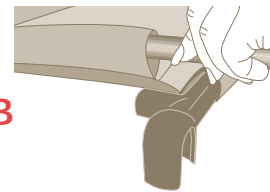

Step 3: Gently press metal button inward while guiding tube into opening of corner U-shaped clip, as shown (Figure C). Be sure that metal button is securely locked into place. Repeat Steps 2 & 3 for other end of tube, ensuring that both ends are securely locked into place (Figure D).

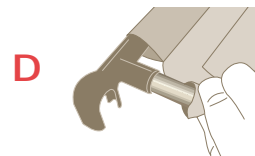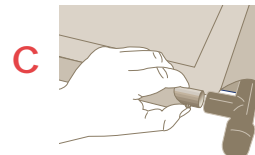

Step 4: Repeat steps 2 & 3 on opposite end to complete assembly of changing table (Figure E).

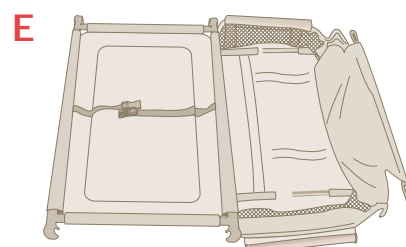

⚠ WARNING!

DO NOT PLACE BASSINET / CHANGING TABLE ON UNIT IF A CHILD IS IN THE COT.
NEVER USE YOUR CANOPY WHEN THE BASSINET/CHANGING TABLE IS IN USE.

IMPORTANT: Make sure cot is fully assembled with all four top rails securely locked.








Step 1: Remove floor pad from cot. Make sure all four top rails are securely locked.

Step 2: Lay bassinet / changing table over cot (Figure A).

Step 3: Tuck bassinet tube ends inside of corner caps (Figure B).

Step 4: Push the two bassinet clips securely onto top rails (Figure C). Position U-shaped clip of changing table over side rail with one end on top of cot knuckle, and the other end centered over corner cap (Figure D). Press down gently ensuring that all clips are resting securely in place (Figure E).

Step 5: Make floor pad into "W" shape and place into bassinet (Figure F). Slide short ends of floor pad under elastic side pockets on bassinet and push down on center. Make sure floor pad is securely under elastic side pockets and sits flat against floor of bassinet (Figure G).

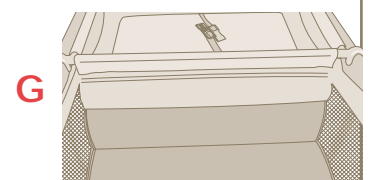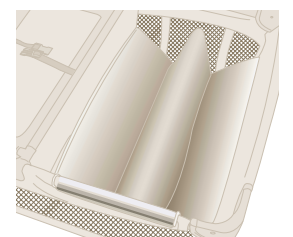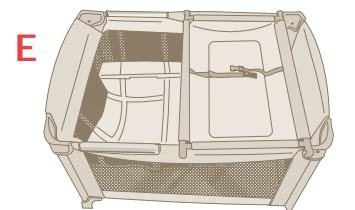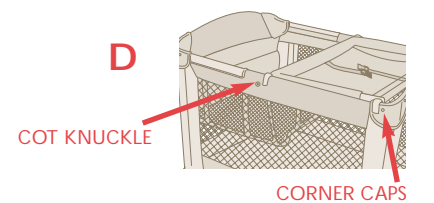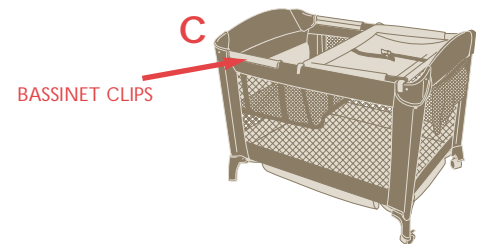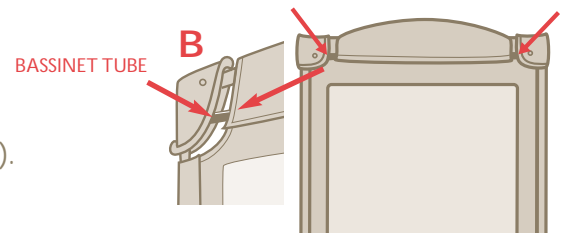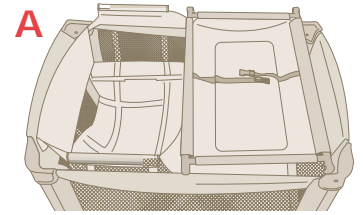

5 TO SECURE CHILD ON CHANGING TABLE:

WARNING!


AVOID SERIOUS INJURY FROM FALLING OR SLIDING OFF. ALWAYS USE SAFETY RESTRAINT.

Step 1: Make sure changing table is resting securely on cot.

Step 2: To fasten restraint buckle, push together as shown.

Step 3: Adjust restraint buckle to fit snugly around child's waist.

Step 4: To unsnap restraint buckle, press tabs.

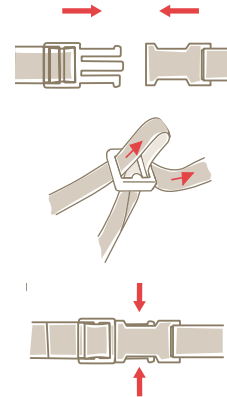


6 TO ATTACH SADDLE BAG:

WARNING!

DO NOT PUT MORE THAN 5 LBS (2.27 KG) IN THIS SADDLE BAG.


Step 1: To attach saddle bag, thread velcro straps through the 3 slots located on the side of the cot and secure straps.

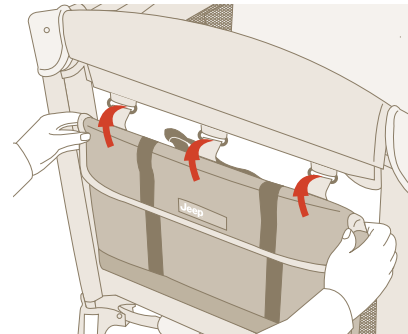

7 TO ATTACH JEEP ELECTRONIC SOOTHER:

NOTE: If Jeep® Electronic Soother includes batteries proceed to Step 2. If not, proceed to Step 1.

Step 1: Requires 4 “AA” batteries (not included). To insert batteries, use a Phillips screwdriver to unfasten battery cover (Figure A). Place 2 “AA” batteries in top battery compartment as shown (Figure B). On bottom of battery compartment, insert remaining 2 “AA” batteries as shown (Figure B). Secure battery cover making sure tabs snap securely into place and tighten screw.

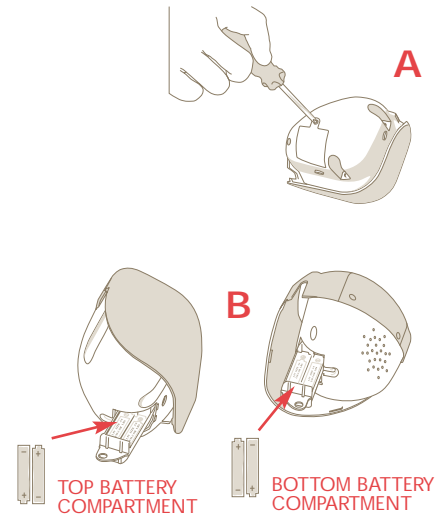

Step 2: Place the Jeep® Electronic Soother over corner cap near bassinet as shown. Press down gently ensuring that it is resting securely into place (Figure C).


⚠ CAUTION ⚠

Do not mix old and new batteries. Do not mix alkaline, standard (carbon-zinc), or rechargeable (nickel-cadmium) batteries. Remove batteries before storing this product for a prolonged period of time.

NOTE: Jeep® Electronic Soother can be placed on diagonal corner caps as shown (Figure C). For proper attachment, make sure Jeep® Electronic Soother is always positioned near the bassinet. If Jeep® Electronic Soother does not fit onto corner cap, DO NOT force. Reposition it on another corner cap.

⚠ CAUTION ⚠

This Soother is not a toy. DO NOT use the soother unless it is attached to the corner cap of playard.

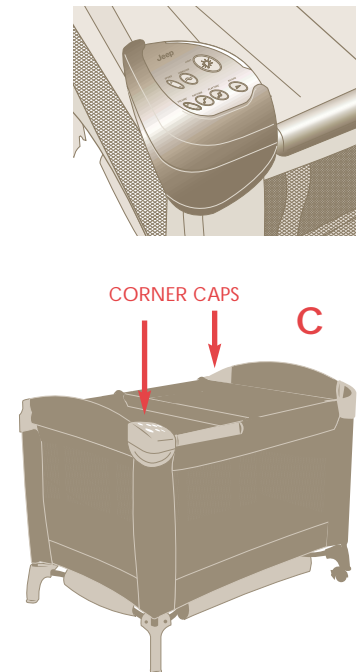

8 TO USE JEEP ELECTRONIC SOOTHER:

Press “VIBRATOR” button to activate vibrating motion. Press “SPEED” to increase or decrease vibrations.

Press “NAPTIME” for soothing music or “PLAYTIME” for lively music. Press “VOLUME” to adjust level of music.

Press “NATURE” for soothing nature sounds. Press “VOLUME” to adjust level of nature sounds.

Press “LIGHT” button to turn on light while checking on child. Light will turn off after 1 minute.

NOTE: To deactivate features, press buttons a second time.




9 TO ASSEMBLE AND ATTACH THE CANOPY:

⚠ WARNING!

When this canopy is properly used, it can provide shade for your child. However, your child may be warmer inside the cot than in a shaded area outside the cot.

IMPORTANT: Make sure cot is fully assembled with floor pad in place.


Step 1: Remove 4 canopy tubes and fabric canopy (Figure A).

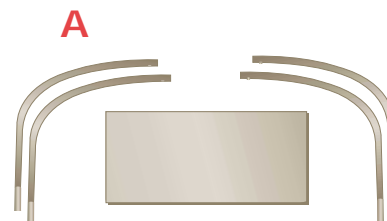

Step 2: Snap 1 piece of canopy tube with the button into canopy tube with hole. Repeat with other 2 tubes (Figure B).




Step 3: Take one of the combined tubes and slide through one of the sleeves at either end of the fabric canopy (Figure C).

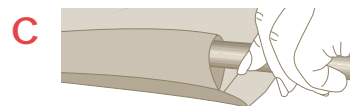


Step 4: Guide ends of tube into openings of corner caps, ensuring that tubes are securely in openings. Repeat for other side (Figure D).

When using the canopy on your cot it should be located on the same side as the roll down weather screen.

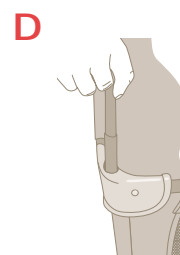

NOTE: When Jeep® Electronic Soother is attached, guide end of canopy tube into opening of soother as shown (Figure E). Press down gently ensuring tube is secure in opening. Canopy can be used with or without soother.

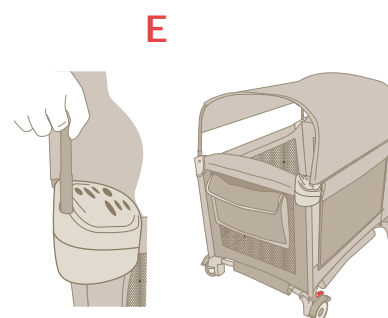

10 TO REMOVE BASSINET / CHANGING TABLE:



Step 1: Remove bassinet floor pad by lifting from center and remove.

Step 2: Remove bassinet clips from cot rails.

Step 3: Remove bassinet tubes from inside of corner caps and remove U-shaped clips of changing table from rails.

Step 4: Remove both short metal tubes from changing table sleeve by pressing metal button inward and guide tube out of opening of U-shaped clips. Repeat process for other side (Figure A).

Step 5: Fold bassinet / changing table and store in zippered compartment on outside of travel bag.

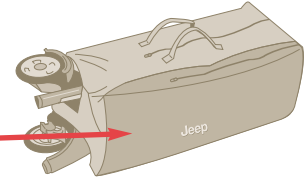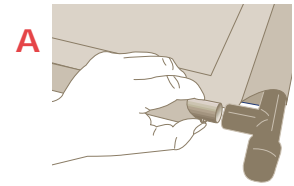


11 TO REMOVE CANOPY:

Step 1: Remove tubes from openings in corner caps. Repeat for other side.

Step 2: Slide the fabric canopy off the tubes.

Step 3: Press the button on the canopy tube to release it from the hole (Figure A). Repeat for other set of tubing.

Step 4: Fold fabric canopy and store with the 4 pieces of tubing in zippered compartment on outside of travel bag.

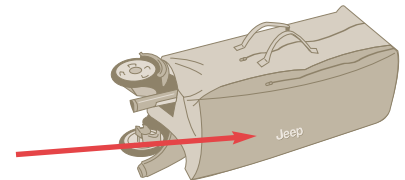

12 TO FOLD COT:

IMPORTANT: Top rails cannot be unlocked first.

Step 1: Remove Jeep Electronic Soother, saddle bag, canopy, bassinet/changing table and cot floor pad (Figure A).

Step 2: Lift center of cot floor by the handle strap until handle strap is even with top rail (Figure B).

NOTE: A sharp fast pull will release floor locks.

Step 3: Locate  on center of each top rail.




Lift and squeeze center of top rail to release lock. Then push down on top rail while continuing to squeeze (Figure C).

NOTE: To fold, top rail must be lifted to release lock. Top rail cannot be pushed in until the lock joint is lifted. If top rail will not unlock, pull up sharply on center floor handle to make sure ALL floor rails are unlocked. Strap must be even with top rails.

Step 4: Repeat for all sides.

Step 5: Pull handle to bring floor completely up and gather legs together (Figure D).

NOTE: To fold compactly, the center of the cot floor must be pulled all the way up.

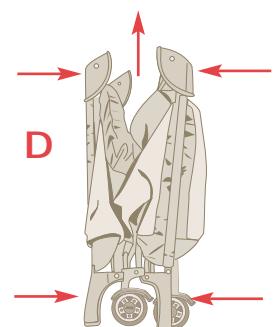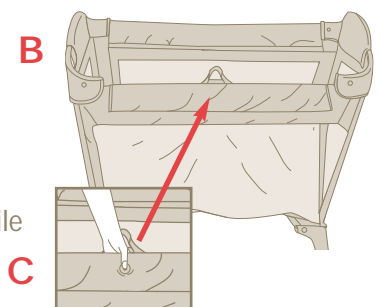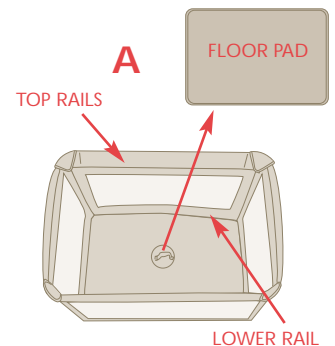

13 TO PACK COT:

Step 1: Lay floor pad flat on the floor, soft side up.

Step 2: Place folded cot off center on second floor panel as shown (Figure A).

Step 3: Wrap floor pad around folded cot. Thread velcro straps through rings on floor pad (Figure B).

Step 4: Turn cot upside down so wheels are in the air. Place travel bag over cot so top of "T" strap on bag is by the feet, not the wheels (Figure C).


Step 5: Pull bag down over cot and turn product upright with wheels on ground. Place Jeep Electronic Soother in center opening (Figure D).

Step 6: Wrap protective flap over electronics. Make sure to tuck flap completely down to cover electronics (Figure E).

NOTE: Electronics can be damaged or batteries may run down if not properly stored in travel bag.


Step 7: Zip travel bag.

Step 8: Store bassinet/changing table, saddle bag and canopy in zippered compartment on outside of travel bag.

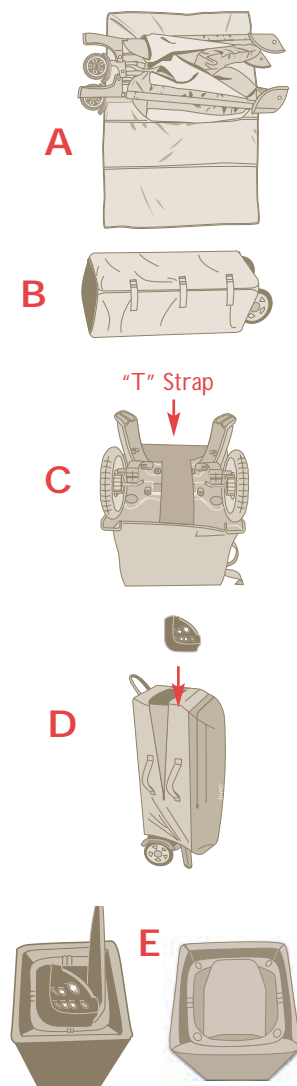

TROUBLE SHOOTING GUIDE

- Top rails fail to lock into an upright position.**
 - Center of floor must be raised up at least half way. A sharp pull on the center floor strap will release floor locks allowing the top rails to be locked upright.
 - If necessary, hold the center floor strap with one hand and lock rails one at a time.

IF ALL TOP RAILS DO NOT LOCK UPRIGHT DO NOT USE COT.
Call Kolcraft Customer Service at: 1-800-453-7673
- The floor joints do not flatten.**
 - Make sure floor joints are free from foreign objects.
 - Turn cot upside down. Make sure all straps are attached and not tangled.
- Top rails do not unlock to fold.**
 - Center of floor must be raised up to level of top rails. A sharp pull on the center floor strap will release floor locks allowing the top rails to be unlocked.
 - Lift top rail first, then squeeze at  to release lock.
- Floor joints do not unlock.**
 - Turn cot upside down and make sure that release straps are attached to the lock release.
 - Raise center floor strap up to the level of the top rails to unlock floor joints.
- Folded cot does not fit into floor pad and it is difficult to attach velcro straps.**
 - Pull center floor strap outward (toward corner caps) and push legs inward to compact cot.
 - Shift cot lower on pad or turn slightly and try again. (See illustration in section 9 for proper placement of cot for folding.)
- Bassinet does not fit onto cot.**
 - Cot top rails must be fully upright and locked.
 - Cot floor must be flat with the cot floor pad installed.
 - Only use bassinet provided with this product.
- Jeep® Electronic Soother does not fit onto corner caps.**
 - Do not force electronic soother over corner cap.
 - Try another corner cap.
 - Electronic soother fits onto 2 diagonal corner caps and should be placed by the bassinet.

CARE / MAINTENANCE

- Wipe surfaces clean using water and mild bleach-free soap.
- Do not use scouring powders, or abrasive cleaners.
- Wipe dry using a soft, clean cloth or air dry.
- Always store your Jeep® baby product in a clean dry place. If exposed to damp conditions, leave fully opened and in a warm environment. Dry off with a soft cloth. Storing a damp cot will encourage mildew to form.

LIMITED WARRANTY

Jeep® is a registered trademark of DaimlerChrysler Corporation, and is used under license by Kolcraft®. © DaimlerChrysler Corporation 2003

KOLCRAFT® warrants this product to be free of defects in materials and workmanship, as follows: For a period of ONE YEAR from the date of purchase, KOLCRAFT will repair or replace, at its option, the defective product.

REPAIR OR REPLACEMENT AS PROVIDED UNDER THIS WARRANTY IS THE EXCLUSIVE REMEDY OF THE CONSUMER. KOLCRAFT SHALL NOT BE LIABLE FOR ANY INCIDENTAL OR CONSEQUENTIAL DAMAGES FOR BREACH OF ANY EXPRESS OR IMPLIED WARRANTY ON THIS PRODUCT, EXCEPT TO THE EXTENT REQUIRED BY APPLICABLE LAW. ANY IMPLIED WARRANTY OF MERCHANTABILITY OR FITNESS FOR A PARTICULAR PURPOSE ON THIS PRODUCT IS LIMITED TO THE DURATION OF THIS WARRANTY.

Some regions do not allow the exclusion or limitation of warranties set forth above, so the above exclusions may not apply to you. This warranty gives you specific legal rights, and you may have other rights. We sincerely thank you for your purchase of this KOLCRAFT product.

For further information visit www.kolcraft.com

SERVICE HOTLINE

Attention to manufacturing detail and strict quality control ensures that this product meets the highest standards set by Kolcraft Enterprises, Inc. If you encounter any problems or need assistance please call our Customer Service /Warranty Department.

Please direct any comments or questions to:

Born with Style
PO Box 789
Gladesville NSW 1675
Australia
Phone: 1300 885 337 or 02 9816 3837
Email: warranty@bornwithstyle.com.au

Replacement parts provided by local distributor due to accidental damage or misuse to product will be charged accordingly.

To contact the manufacturer directly:

Kolcraft® Enterprises, Inc. Consumer Service Department
10832 NC Highway 211East
Aberdeen, NC 28315
1-800-453-7673 in U.S. & Canada, 1-910-944-9345 outside U.S. & Canada
Eastern Standard Time, 8 am-5 pm

PERSONAL RECORD CARD

Once in a while, we are less than perfect and one of our products reaches a customer with a problem. In most cases, we can solve your problem with replacement parts. Please contact us before you return one of our products to the store. Once a product is returned, it cannot be resold. The materials and the energy used to make it are wasted.

Please fill in the information in the space provided and attach a copy of your purchase receipt. You will need this information to obtain warranty service.

You can find the Model Number and Date of Manufacture on a sticker located on the cot leg.

MODEL NUMBER: _____

DATE OF MANUFACTURE: _____

DATE OF PURCHASE: _____

TO ORDER COT SHEETS

Cot sheets are available through Kolcraft's Customer Service Department. To order sheets, please contact Kolcraft's Customer Service at 1-800-453-7673 or via email at customerservice@kolcraft.com